


CONTROL PANELS

4 / 12 / 17-button control panel BT-2004 / BT-2012 / BT2017

The control units BT-2004 / / BT-2012 / BT-2017 meet all the requirements that are required to operate a special signal system.

Product features:

- **Standard functions:**
 - Beacons on including horn ring preselection
 - Continuous signal
- **Possible functions:**
 - Front flash
 - High power front flash
 - Work and search lights
 - LED displays
 - Backlighting
 - Radio main switch
 - test
 - 3. Beacon
 - etc.
- **4 control LEDs e.g. for:**
 - Beacon control
 - City / country signal indicator
 - Headlights
 - LED display
 - etc.
- **Illuminated keys (with night locator lighting)**
- **Possibility of an acoustic signal when a function is activated**
- **Function locks according to customer requirements**
- **CAN bus**

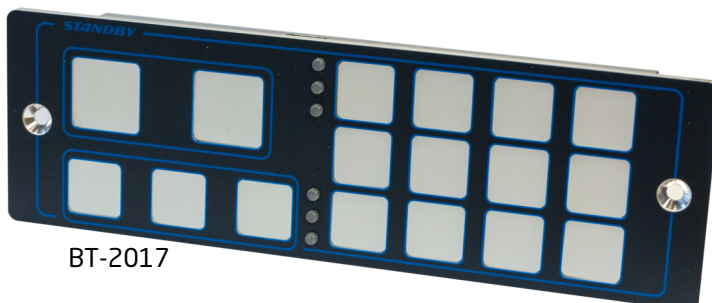


BT-2017




BT-2012



BT-2004

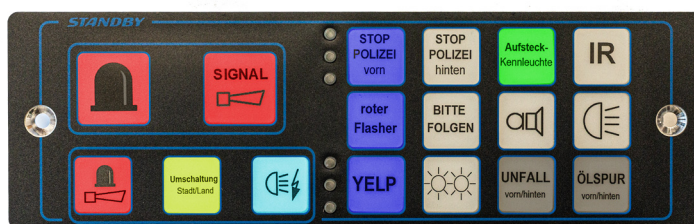


Belegungsbeispiel BT-2017

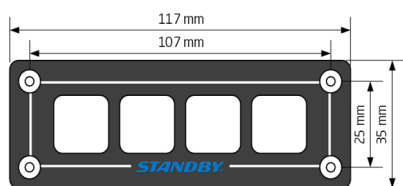

BT-2004

Einbautiefe: 26 mm

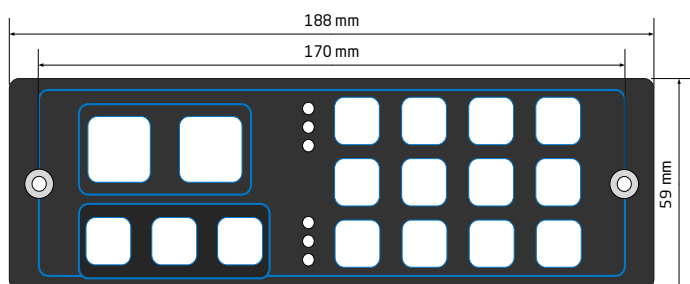

BT-2012 / BT-2017

Einbautiefe: 30 mm

TECHNICAL DATA

operating voltage	12/24 VDC (10.8 ... 28.8 VDC)
mounting	built in mounting
dimensions	BT-2004: 117 x 35 x 26 mm BT-2012: 188 x 59 x 30 mm BT-2017: 188 x 59 x 30 mm
weight	BT-2004: approx. 86 g BT-2012: approx. 233 g BT-2017: approx. 205 g
protection class	IP54
interface	CAN-Bus
connector	MOLEX MicroFit Jr., 4 pin
approval	acc. ECE R10