

## WIRING


To +VDC for Warning Mode: ..... **WHITE**  
(Fuse Rating @ 2A)

To -Chassis Ground: ..... **BLACK**

For Flash Pattern & Sync: ..... **BROWN**

**CAUTION:** Ensure that the mounting surface is evenly flat; mounting this lighthead on non-flat surfaces may result in bending and/or water ingress.

**NOTE:** When using adhesive mount, ensure that the mounting surface is clean, dry and well unified before mounting.

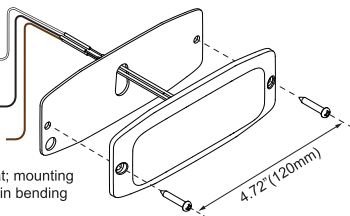

## OPERATION

### For Flash Patterns:

Momentarily apply +VDC to **BROWN** wire:

- once for next pattern
- quick three times for FP#1

**NOTE:** This unit may not be factory-set at FP#1.

FP#	Flash Pattern							
1	Double	[R65]	11	Quint	[SAE]	21	Triple	(Split)
2	Single	[2HZ]	12	Mega		22	Quad	(Split)
3	Triple	[2HZ]	13	Giga		23	Quint	(Split)
4	Quad	[2HZ]	14	Ultra	[SAE]	24	Mega	(Split)
5	Random		15	Single-Quad		25	Giga	(Split)
6	Steady/Cruise		16	Single H/L		26	Ultra	(Split)
7	Single	[SAE/CA13]	17	Single-Triple-Quint		27	Single-Quad	(Split)
8	Double	[SAE]	18	Half-Steady-Half-Double	(Split)	28	Single H/L	(Split)
9	Triple	[SAE]	19	Single	(Split)	29	Single-Triple-Quint	(Split)
10	Quad	[SAE]	20	Double	(Split)	30	Steady-Dim EF	

\* Actual approval will be based on the model purchased.

\* Split = Top-half alternating Bottom-half.

### For Simultaneous or Alternating Synchronization:

- Apply +VDC to **WHITE** and **BROWN** wires simultaneously to enter *Grouping mode*; the lighthead will display short (single or double) flashes:
  - Single flash = Group1
  - Double flash = Group2
- Remove **BROWN** wire from +VDC and momentarily apply to +VDC to change Group:
  - Lightheads in the same Group will flash together.
  - Group1 lightheads and Group2 lightheads will flash alternately.
- Save and exit *Grouping Mode* by disconnecting all power
- Connect **BROWN** wires of multiple lightheads together for synchronization; all lightheads should be set to the same Flash Pattern.