

HEADLIGHTS

Pictor 620

With the Pictor 620 you are guaranteed to hit the mark.

This LED work light was developed for mounting on vehicle bodies in order to optimally and specifically illuminate your work area.


The Pictor 620 is light, small and impresses with its particularly highly effective light output. The mechanical and thermal resistance of the Pictor 620 is excellent thanks to the newly reinforced aluminum housing.

There are two versions available. The first version with an optimized light pattern for mounting below the vehicle body, the second version for mounting above the vehicle body.




The Pictor 620 can be used universally in the areas of fire brigade, municipal vehicles and special vehicle construction.



**Pictor 620, 1800lm
Flood TT DS**

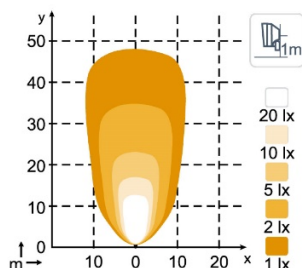

**Pictor 620, 1800lm
Flood TD US**

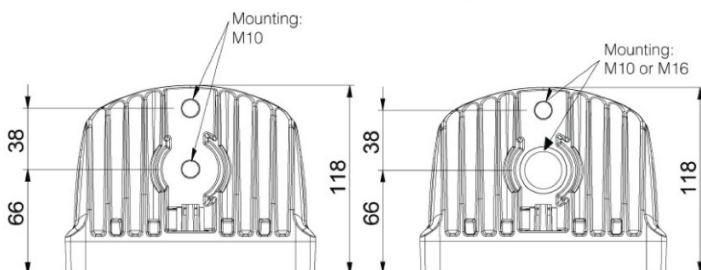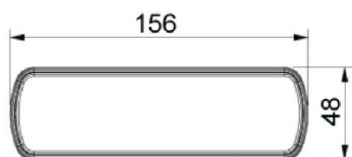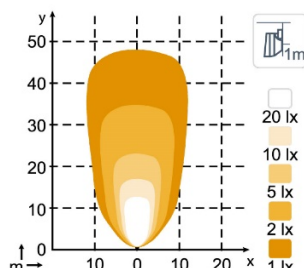

TT DS (Top Top)
Lightpattern: Downside



TD US (Top Down)
Lightpattern: Upside



TECHNICAL DATA

operating voltage	12 / 24 VDC (9 ...16 / 18 ... 32 V)
power consumption	28 W
current consumption	12V: 2.0 A 24V: 1.0 A
luminous flux	1800 lm
colour temperature	5000 K
impact and shock resistance	60 G
vibration resistance	15.3 grms ; 24-2000 Hz
mounting	M16 or M10
weight	0.7 kg
ambient temperature	-40 °C ... +85 °C
protection class	IP 68, IP6K9K
salt spray	ISO 9227 240H
approvals	EMC: CISPR 25 Class 5, ISO 13766 ISO 14982, ISO 7637-2 ISO 13309, ISO 11452-2 EN 61000-4-2, EN 12985

ARTICLE NUMBER	DESCRIPTION
N987-204B	Pictor LED 620 US
N987-205B	Pictor LED 620 DS