



## ACCESSORIES

### Microphone TM 215

The proven TM215 stick microphone is used to make voice announcements via the special signal system. It can be connected directly to a control device or to an operating device using an appropriate connection cable.

The microphone is noise-compensated, has a cardioid pickup pattern and a large transmission range. This combination, in conjunction with the "super cardioid" characteristic, guarantees high voice quality.

Thanks to the universal clip holder, the microphone can be attached anywhere in the vehicle and is always at hand when it is needed. The smaller connector (compared to the TM110RS) enables easy installation, even with little installation space.

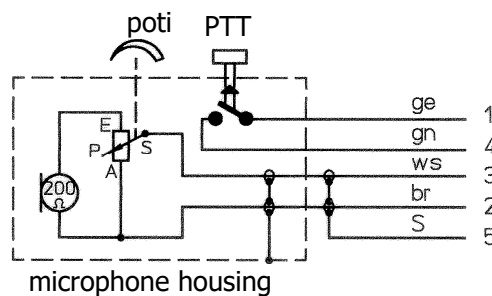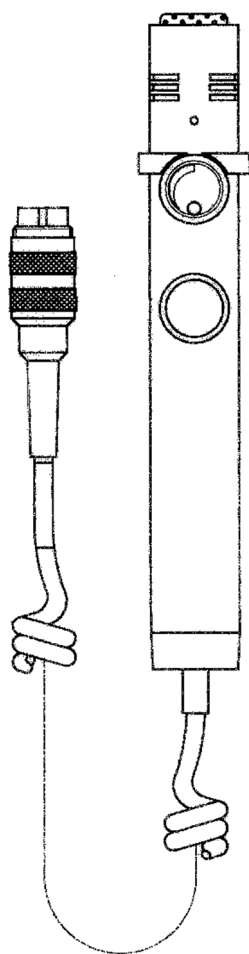

ARTICLE NUMBER	DESCRIPTION
50188400187	Microphone, passive, K-SM 30/MS-300
50188400129	connection cable for microphone

TECHNICAL DATA	
transmission range	20 ... 12,000 Hz
characteristics	Supercardioid
AF-level	4 mV
impedance	200 Ω
dimensions	Ø 29 x 170 mm
cable	250 ... 2,300 mm coiled cable
weight	approx. 235 g