
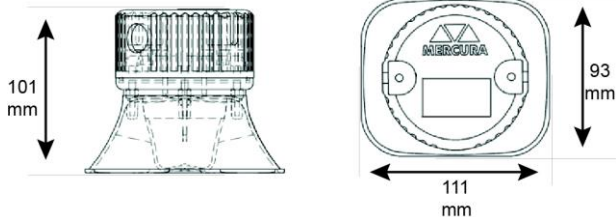


# MP5 SOLO / DUO SIREN

- MP5 SOLO 12V with French EMERGENCY tones : 26899
- MP5 SOLO 12V with French POLICE tones : 26900
- MP5 SOLO 12V with INTERNATIONAL tones: 26677
- MP5 SOLO 24V French Fire Brigade : 29060
- MP5 DUO 12V with French EMERGENCY tones : 26904
- MP5 DUO 12V with French POLICE tones : 26905
- MP5 DUO 12V with INTERNATIONAL tones : 26907
- MP5 DUO 24V French Fire Brigade : 29061

<p>MP5 SOLO/DUO is a multi-tone loudspeaker with an integrated siren (up to 4 tones).</p> <ul style="list-style-type: none"> <li>• SOLO Version: 1 compact loudspeaker with integrated siren</li> <li>• DUO Version: 1 compact loudspeaker with integrated siren + 1 standard compact loudspeaker</li> </ul> <p>Siren tones : (Tone 1/ tone 2/ tone 3/ tone 4)</p> <ul style="list-style-type: none"> <li>• Emergency : SPO / ASA /UMH / reverse bip</li> <li>• Police : Police / Gendarmerie / SNA / reverse bip</li> <li>• US : Wail / Yelp / Hi-Lo / reverse bip</li> </ul>	<p>"E" Marking European Directive 2009/19/EC N° "e2*03*12111".          "E" Marking Regulation N° R10 "E2*10R04*12111".          EMC Compliance          Immunity tests according to the Directive 2009/19/CE and R10 regulation          Protection of radio equipment according to CISPR25 (2008) mobile services.          Radiated noise level in compliance with Class 5 in the band 30-1000 MHz.          Conducted noise level in compliance with Class 5 in the band 30-50 &amp; 75-108 MHz.          Electrical compliance          ISO 7637-2 Class A or B (Normal operation during disturbances).          No reset of the siren to Vbat = 6 volts for 15 ms.</p>
<p>Input voltage : 12V or 24V</p>	<p>Tones approvals :          POLICE: TP POL 12114 / GENDARMERIE: TP GEN 12115 / UMH: TP UMH 12117          ASA: TP ASA 12118 / FIRE BRIGADE: TP SPO 12116</p>
<p>SOLO : 1,9 A for 13,5 volts / 1,1A for 27 volts          DUO : 3,7 A for 13,5 volts / 2A for 27 volts</p>	<p>Module fully resin-coated for protection against humidity.          Protection rating : IP66 and IK08</p>
<p>Loudspeakers : 30W - 4 Ohms – with Neodymium magnet          SOLO : Siren output &gt; 111 db          DUO : Siren output &gt;117 db</p>	
<p>Weight loudspeaker with integrated siren: 0,660 Kg          Weight loudspeaker only: 0,460 Kg</p>	
<p>Length : 101 mm ; Width : 111 mm ; Height : 93 mm</p>	
<p>WARNING! US tones are not authorized on French territory. Mercura will not be responsible for any damage or accidents resulting from the use of these tones in France.</p>	

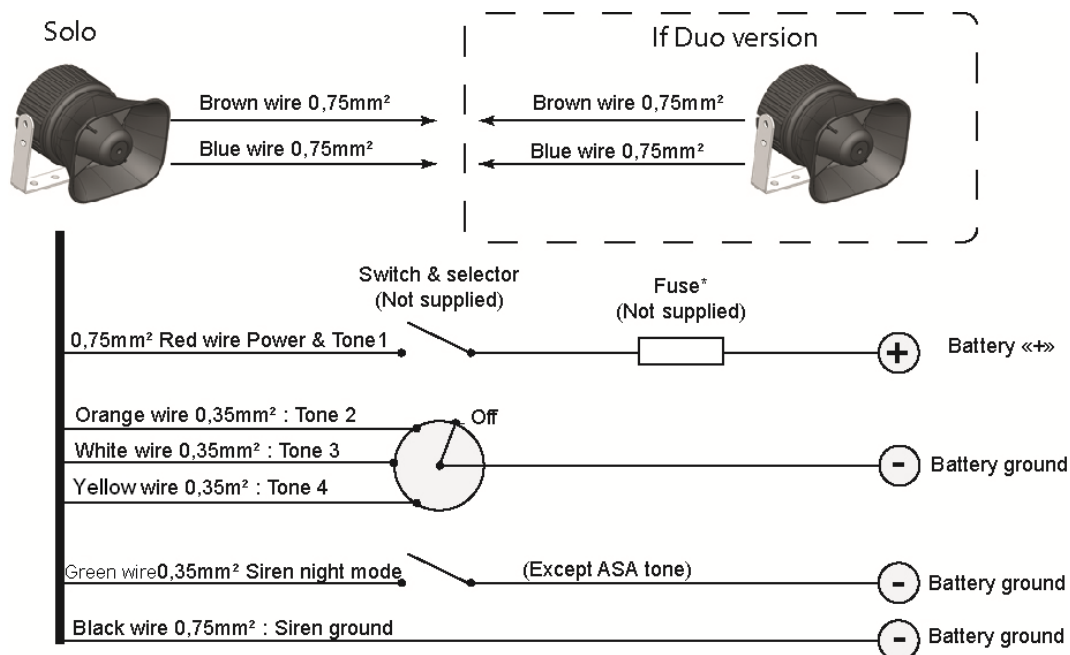

\* Fuse value : 5A