


Synchros

- Early recognition of danger spots
- Synchronized light sequence to ensure safe passing of the hazardous spot
- Space saving placement in compact storage and charging box
- Charger cable with 2-pole vehicle plug
- Two synchros combinable with each other

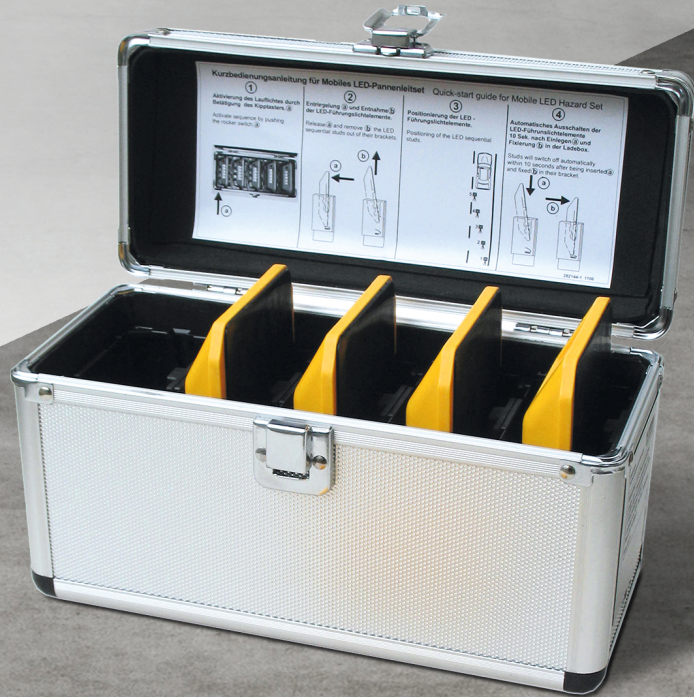

	Light colour yellow or blue	Eff. light intensity 500 cd yellow 100 cd blue		Aperture angle horizontal/ vertikal 15°		Operating voltage 10 - 30V DC
	Operation time ca. 16 hrs	Dimensions (LxWxH) LED guide light element 100 x 90 x 25 mm	Dimensions (LxWxH) transport and storage case 260 x 160 x 125 mm		Weight 2.5 kg	

Synchros

Mobile LED Sequential Hazard Set 12/24 V, yellow, cpl. 141060-1
 Mobile LED Sequential Hazard Set 12/24 V, blue, cpl. 141060-2
 each set consisting of:
 5 LED guide light elements yellow resp. blue
 1 transport and charging box with
 1 charging cable with 2-pole vehicle plug

Ref. No.

Accessories and Spare parts

Mains charger for 230 V 070157-1
 Mains charger, UK version (not illustrated) 070157-2
 Amber stud for Synchros 241060-1
 Blue stud for Synchros 241060-2
 Charging cable for Synchros with straight plug 400225-2

Ref. No.



Single element



Blue version



Charging cable



More information
 NIS-00386
 To be entered on nissen-germany.com