SRP-MS6

12~24VDC

Dual MS6 RegPlate Warning System







FEATURES

- Pre-assembled Dual MS6 RegPlate System for Euro style reg plates.
- Certified ECE R65 Class 2 high performance.
- Approved ECE R10 EMC Compliance.
- Flexible rubber body to fit most vehicle surface.
- 3 meter cable for easy wiring installation.
- Synchronized flash simultaneously, alternatingly or in unique criss-cross split flash.
- Fully weatherproof and vibration resistant design.
- Solid aluminium housing for efficient heat dissipation and maximum durability.
- Reverse polarity and load dump protection.

SPECIFICATIONS

Compliance: ECE R65 (XA2, XB2); ECE R10

LED Element: High intensity LED x 6 per Head (total 12 LEDs)

No. of Warning Patterns: 31
Operating Voltage: 12~24VDC

Avg. Current: 1.2A@12VDC / 0.6A@24VDC

(varies with flash pattern)

Max. Current: 2.4A@12VDC / 1.2A@24VDC Avg. Power (varies with flash pattern): 14.4W

Max. Power: 28.8W
Wires: Red-Vcc: 20AWG
Black-GND: 20AWG

Green-Flash Patterns & Sync (HEAD1): 20AWG Yellow-Flash Patterns & Sync (HEAD2): 20AWG

White-Low Power: 20AWG


Cable Length: 300cm Fuse Rating: 3A

Synchronization: Up to 15 Lightheads

Storage Temp. (°C): $-40^{\circ} \sim +75^{\circ}$ Working Temp. (°C): $-20^{\circ} \sim +60^{\circ}$

Lens Colour: Amber, Blue **Lens Colour:** Clear **Warranty:** 5 Years

DIMENSIONS

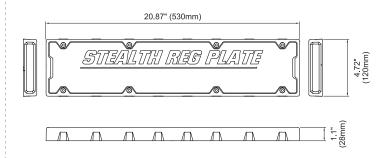

Replace x for colour:


A = Amber LED, Clear Lens B = Blue LED, Clear Lens

FLASH PATTERNS

Flash Pattern Chart					
0	Quad	(split)	16	Single H/L	
1	Double	[R65]	17	Single-Triple-Quint	
2	Single	[2Hz]	18	Half-Steady-Half-Double	(split)
3	Triple	[2Hz]	19	Single	(split)
4	Quad	[2Hz]	20	Double	(split)
5	Random		21	Triple	(split)
6	Steady / Cruise		22	Quad	(split)
7	Single	[SAE/CA13]	23	Quint	(split)
8	Double	[SAE]	24	Mega	(split)
9	Triple	[SAE]	25	Giga	(split)
10	Quad	[SAE]	26	Ultra	(split)
11	Quint	[SAE]	27	Single-Quad	(split)
12	Mega		28	Single H/L	(split)
13	Giga		29	Single-Triple-Quint	(split)
14	Ultra	[SAE]	30	Steady-Dim*	
15	Single-Quad				

(split) = criss-cross split flash

^{*} Use for compatible external flasher only.







Rev.200909 © 2020 Juluen