


LP6 LED PAD

6-LED LIGHT HEAD (Surface Mount)

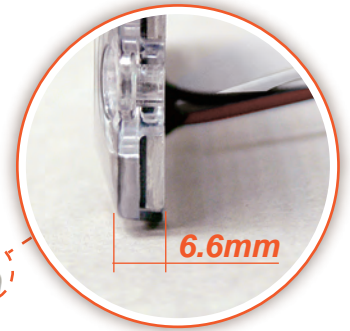

M45

FEATURES

- Super low profile for discreet mounting.
- Self-Adhesive backing for quick simple mounting.
- Multi-Voltage Input 12~24VDC.
- Built-in 23 selectable flash patterns.
- LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multiple units are synchronizable and can flash simultaneously or alternately.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for external or internal use.

SPECIFICATIONS

Meets: SAE J595 Class 1, CA13 Class B, ECE R10

Bulb: High-power LED x 6pcs

Warning Patterns: 23 Flash Patterns

Operating Voltage: 12~24VDC

Avg. Current: 0.25A @12VDC / 0.125A @24VDC
(varies with flash pattern)

Avg. Power: 3 Watts (varies with flash pattern)

Max. Current: 0.5A @12VDC / 0.25A @24VDC

Max. Power: 6 Watts

Wires: White-Vcc : 20cm (24AWG)

Black-GND : 20cm (24AWG)

Brown-Flash Patterns & Sync : 20cm (24AWG)


Fuse Recommended: 1A

Multi-Unit Synchronization: Over 15 units

Available in: RED , BLUE , AMBER , WHITE

Warranty: 1 year.

DIMENSIONS

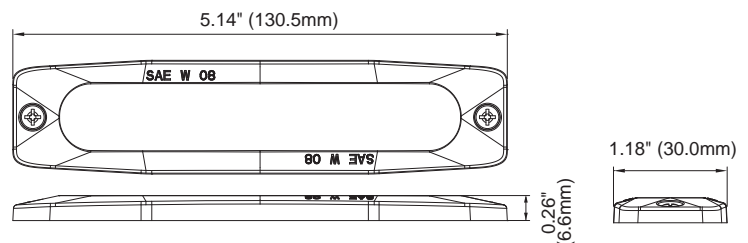

FLASH PATTERN

| FP# | Flash Patterns | | |
|-----|---------------------|----|--------------------|
| 1 | Single (2Hz) | 13 | Single H/L (split) |
| 2 | Double (2Hz) | 14 | Single (all) (SAE) |
| 3 | Triple (2Hz) | 15 | Double (all) (SAE) |
| 4 | Quad (2Hz) | 16 | Quad (all) (SAE) |
| 5 | Random | 17 | Quint (all) (SAE) |
| 6 | Single (split) | 18 | Mega (all) |
| 7 | Double (split) | 19 | Ultra (all) (SAE) |
| 8 | Quad (split) | 20 | Single-Quad (all) |
| 9 | Quint (split) | 21 | Single H/L (all) |
| 10 | Mega (split) | 22 | Steady Half |
| 11 | Ultra (split) | 23 | Steady All |
| 12 | Single-Quad (split) | | |

*SPLIT=Left alternate Right

*ALL = Simultaneous