

LED-BEACONS


Z2 mini / micro

The Z2 mini / micro is designed for use on large vehicles and can be set up on the corners of the vehicle or in the middle area.

It is manufactured and programmed according to your wishes.


Product features:

- Main beacon with up to 1300 cd to the front and rear (mini)
- With 16 (micro) or 32 (mini) high-performance LEDs
- Indicators to the front and / or to the rear, the rear indicator modules can also be used in parallel as a rear warning system
- side work lights in various shapes and orientations
- LED command light
- Light sensor
- Infrared module (helicopter detection light)
- Charge Light
- And much more

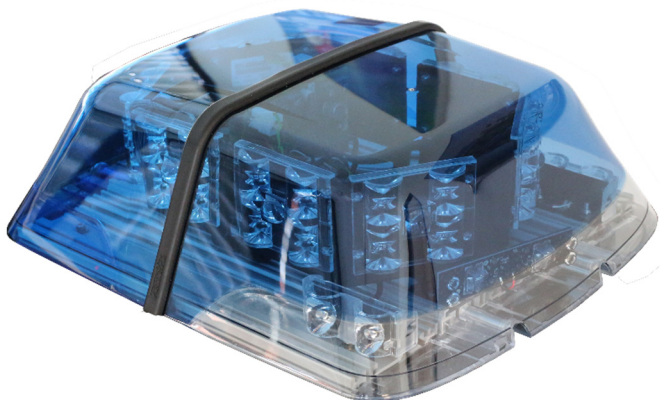

When designing the software, we offer you the following options:

- Control via our bus system, CAN-Open, Fire-CAN, Inomatic, EDSC or also in parallel
- Design of the lightning pattern
- Night reduction in rotating light mode
- Column circuit
- And much more

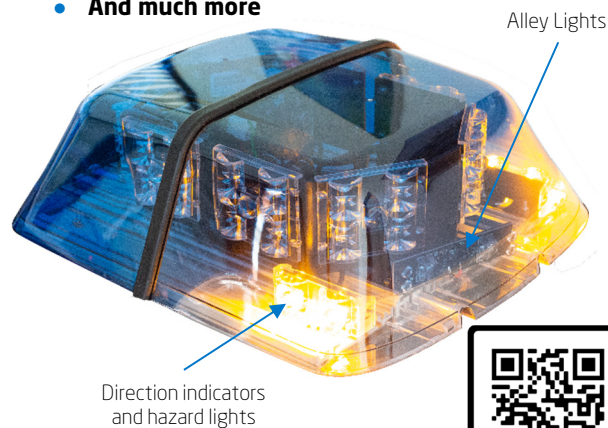

Product videos:



TECHNICAL DATA	Z2 mini	Z2 micro
operating voltage	12 / 24 VDC (10.8 ... 14.4 / 21.6 ... 28.8 VDC)	
current consumption		
- warning lights	8 A	4 A
- alley lights		
- indicators		
amount of LEDs (warning light)	32	16
dimensions	413 x 346 x 127 mm	
ambient temperature		
- operation	-25°C ... +70°C	
- storage / transport	-40°C ... +80°C	
addons	indicators, warning lamps alley lights	
approvals	E1 002678 (light, blue) E1 013122 (light, indicator front) E1 013123 (light, indicator rear) ~~~ W 25042 (acoustic) E1 034705 (EMC)	