

# R<sup>6</sup>esponder Series

## LED Scenelight / Illumination Lighthouse



### FEATURES

- 3036 lm powerful LED scenelight for vehicle illumination.
- Reverse polarity protection.
- Weatherproof IPx7 rating with vibration resistant design for internal or external use.
- Solid aluminium base for efficient heat dissipation.
- Optional Chrome or Black flanges.
- ECE R10 EMC Compliance.

### SPECIFICATIONS

#### Compliance:

**Photometric-** KKK 1822F; AMD024

**EMC-** ECE R10; CISPR 25

**IP Code-** IPx7

**Light Source:** High-power LED x 12 pcs

**Raw Lumen:** 3036 lm

**Effective Lumen:** 1060 lm

**Operation Voltage:** 12-24VDC

**Average Current (A):** 1.20A@12VDC ; 0.61A@24VDC

**Average Power (W):** 14.64

**Max. Current (A):** 1.8A@12VDC ; 0.92A@24VDC

**Max. Power (W):** 21.96

#### Wires:

**Red-Vcc Activation:** 25cm (20AWG)

**Black-GND :** 25cm (20AWG)

**Fuse Rating (A):** 2.0

**Storage Temp. (°C):** -40° ~ +75°

**Working Temp. (°C):** -30° ~ +65°


**LED Colour:** White

**Lens Colour:** Clear

**Warranty:** 5 Years

### DIMENSIONS

#### Surface mount w/o flange bezel

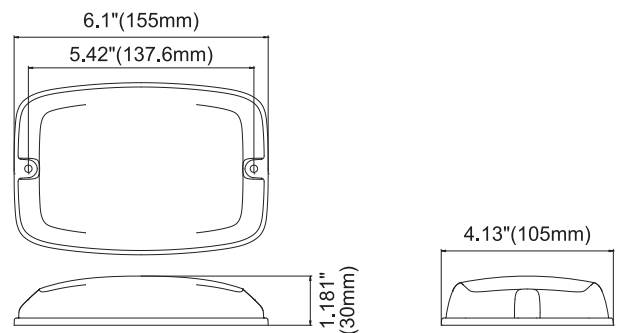

#### Surface mount w/ flange bezel

